


# FIBER OPTIC - ACCENT LIGHT



**IL2501**

**FIXED LENS DOWNLIGHT**

Max Overall Dimensions: 1.969" (OD) x 1.535" (H) (50mm x 39mm)

Trim / Flange Dimensions: 1.969" (OD) x 0.157" (H) (50mm x 4mm)

Aperture Diameter: 1.063" (27mm)

Rough-in / Cut out: 1.575" (40mm)

Recess: 1.378" (35mm) excluding fiber

Primary Material: Metal

Lens Type: Beveled glass lens


Beam Angle: 15 (min) – 25 (max)

Fiber Type: Recommended ILPT 12-75

Finishes: Black, White, Gold, Silver

Ferrule Requirement: 8mm or 10mm ferrule required

Mounting: Spring clips included



**IL2502**

**LENSED DOWNLIGHT, CLEAR OR FROSTED LENS**

Max Overall Dimensions: 1.969" (OD) x 1.535" (H) (50mm x 39mm)

Trim / Flange Dimensions: 1.969" (OD) x 0.157" (H) (50mm x 4mm)

Aperture Diameter: 1.063" (27mm)

Rough-in / Cut out: 1.575" (40mm)

Recess: 1.378" (35mm) excluding fiber flange

Primary Material: Metal

Lens Type: Clear or frosted glass lens



Beam Angle: 48°

Fiber Type: Recommended ILPT 12-75

Finishes: Black, White, Gold, Silver

Ferrule Requirement: 8mm or 10mm ferrule

Mounting: Spring clips included



**IL06100822**

**SWIVEL FLOODLIGHT WITH LENS**

Max Overall Dimensions: 0.984" (OD) x 1.772" (H) (25mm x 45mm)

Aperture Diameter: 0.748" (OD) (19mm)

Rough-in / Cut out: Surface mount

Primary Material: Stainless Steel, V2A

Lens Type: Beveled glass lens

Beam Angle: 15 (min.) – 35 (max.)

Fiber Type: Recommended ILPT 12-62

Rotation: 270°

Max Tilt Angle: +/- 90°


Finishes: Stainless Steel

Ferrule Requirement: 8mm or 10mm ferrule

Mounting: Screw through yoke



# FIBER OPTIC - ACCENT LIGHT

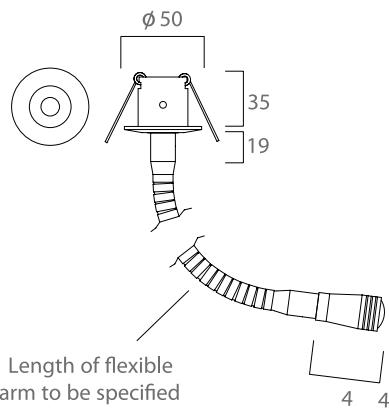

**IL2508**

## **FLEX-ARM**

Max Overall Dimensions: 1.969" (OD) 3.858" (H) (50mm x 98mm)  
plus length of the arm

Tube Diameter: 0.335" (8.5mm)

Drop below ceiling: 6.299" (160mm) vertical max.

Rough-in / Cut out: 1.575" (40mm)

Recess: 1.378" (35mm) excluding fiber

Primary Material: Aluminum, Steel Arm

Lens Type: Clear glass (60°) or lens (15-35°)

Fiber Type: Recommended FSPT 25

Finishes: Black, White, Gold, Silver

Ferrule Requirement: Special ferrule required

Mounting: Spring clips included

Note: Consult factory for custom length

