

THE ION QUANTUM™ SERIES

ION QUANTUM™ SERIES

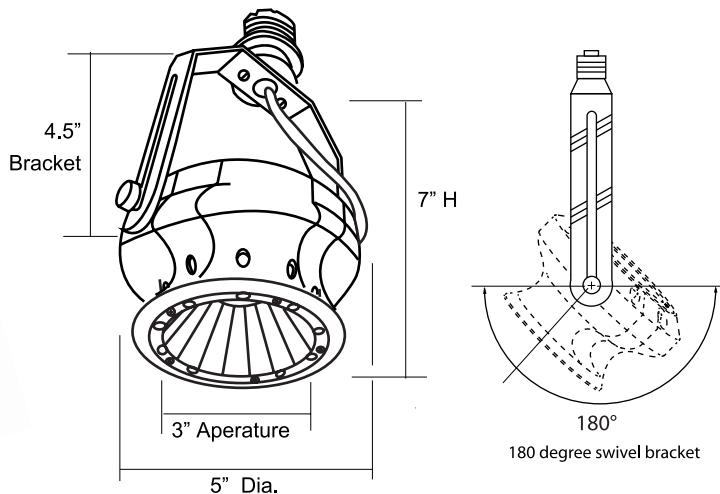
The LED Lamp Fixture retrofits existing 120VAC lamps / edison base (constant power supply needed) for industrial style low bay fixtures. It uses only 60 watts of power and produces 4500 lumens with a compact hi powerLED array. Built of aluminum with an adjustable mounting bracket for optimal downlight cut off. It can also swivel on the mounting bracket up to 180 degrees, ideal for fine tuning the beam direction.



96

FEATURES

Impact Lighting Inc.'s Lighting's Thermo-Matrix Cooling Technology; Compact high flux density light source; Uniform high quality illumination. Streamlined thermal path; Energy Star / ANSI compliant binning structure; More energy efficient than incandescent, halogen and fluorescent lamps; Low Voltage DC operation; Instant ON with dimming; Long operating life; RoHS compliant and Pb free.


LED Lamp Fixture
REPLACES HID/MH & INCANDESCENT


BENEFITS

Enhanced optical control; Clean white light w/o pixilation; Significantly reduced thermal resistance and increased operating temperatures; Uniform consistant white light; Lower operating cost; Increased safety; Easy to use with daylight and motion detectors to enable increased energy savings; reduced maintenance cost; Environmentally friendly, no disposal issues.

SPECIFICATIONS

CONSTRUCTION:	Aluminum / polycarbonate lens
FINISH:	Clear Anodized Aluminum
VOLTAGE:	Input 120-277VAC / Constant current @27V
POWER:	60 Watts / 5 Amps
IP RATING:	Indoor
LAMP LIFE:	60,000 lumen maintenance at 40C
BEAM SPREAD:	40 and 60 degrees
MOUNTING:	E26 Edison Base
DIMENSIONS:	5"dia, 3" aperture; x 7"H
WEIGHT:	1.5 lbs
WARRANTY:	1 year

ORDER INFORMATION

MODEL IPFX	*VOLTAGE	COLOR TEMP	BEAM SPREAD	FINISH	MOUNTING
Impact Lighting Inc. LED Lamp Fixture	U - 120 100 -277 Univerasal PS	WW 3500K CW 5000K	40 - 40 Degrees 60 - 60 Degrees	A - Aluminum B - Black	Y - YOKE P - Pendant

* Power supplies are depended on length of run or quantity of fixtures for area.