

LED THINGLOW™ SERIES BASIC




THINGLOW™ NON-WATERPROOF

ThinGlow LED illumination system is broadly used for general illumination within commercial and residential applications. The ThinGlow is incredibly versatile and its ease of install makes it an excellent and economical choice for cove, under/over cabinet, toe kick, display case, light boxes, accent, back lighting, stairway, and other illumination applications.

ThinGlow uses a continuous flexible conductor carrier to electronically connect the LED modules, which can be mounted to any finished surface with its adhesive backing that covers 100% of the strips backing. ThinGlow line is the only LED system in the industry with replaceable LED modules.



136

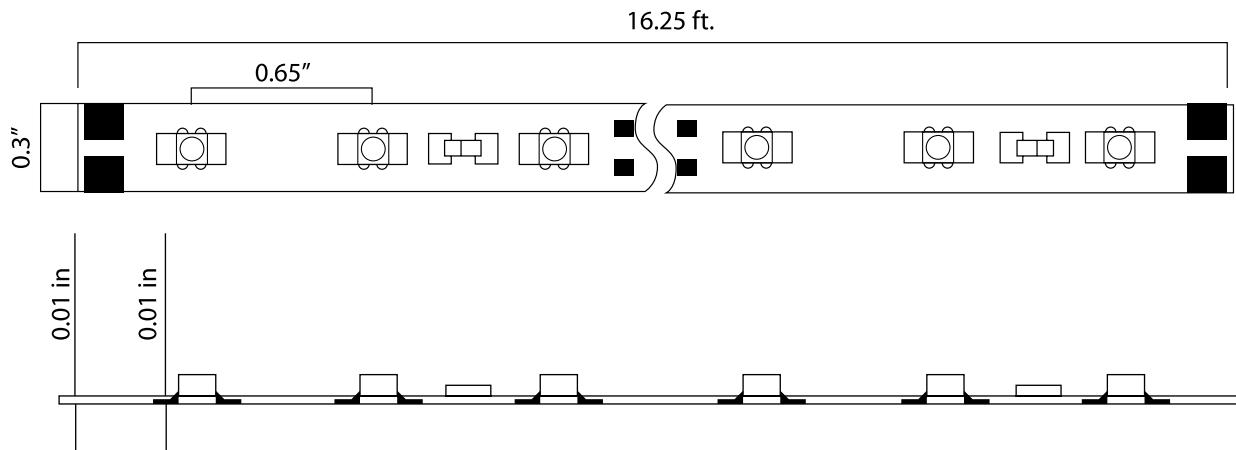

APPLICATIONS

Indoor step lighting decorative lighting Archway, cove lighting, edge lighting, indoor amusement park, restaurants, nightclubs, theater and aircraft cabin mood lighting emergency hallway lighting.

SPECIFICATIONS

LED Light Source:	3528 SMD LED
Standard:	300 LEDs per roll (16.25 feet)
Beam Angle:	120 degrees
Working Voltage:	12V DC
Working Current:	400mA per meter (3.28 feet)
Power Consumption:	1.50 watts per foot (24watts per roll)
LED Light Output Per Roll:	W: 1350lm, R:800lm, G:900lm, BL:600lm, AM:550lm
Package:	16.25 feet per roll (5 meters)
Colors:	IL-TG-WW (Warm White), IL-TG-CW (Cool White), IL-TG-RGB (Color Changing), IL-TG-B (Blue), IL-TG-R (Red), IL-TG-AM (Amber), IL-TG-G (Green)

* Power supplies are depended on length of run or quantity of fixtures for area.

ORDER INFORMATION

MODEL	COLOR TEMP	LENGTH	LEAD WIRE	END CAPS	CHANNEL EXTRUSION	TAPE	ADJUSTABLE BRACKETS
IL-TG							
Impact Lighting Inc.	WW- Warm White				003-SILVER		
ThinGlow	CW - Cool White				003-WHITE		
	R - Red				003-TRANSPARENT		
	B - Blue				004-SILVER		
	G - Green				004-WHITE		
	AM - Amber						
	RGB - Color Changing						